

# Airport De-icer

**Truck Mounted**



**50, 75 or 100 Ft. boom width**  
**250 gallon - 5000 gallon tank capacity**

### Pump Station

- 9, 16 or 18 HP engine packages available.
- 300 GPM centrifugal pump
- Integral pump station capable of load, unload and transfer

### Power Boom Folds

- Available with full cab controlled power or manual booms

### 3-Section Boom Shut-off

- Capable of spraying in the fully closed position which allows roadway applications

### Heavy Duty Trailer

- Low center of gravity
- Power Surge brakes

## Trailer Mounted



**10 Ft. - 50 Ft. boom width**  
**250 gallon - 3000 gallon tank capacity, stainless steel or poly**  
**Available with cab controlled engine and spray functions**

**WAUSAU™**



### 5-Section Boom Shut-off


Booms may be sprayed in fully closed position, partially opened position, or fully opened position. Boom widths of 50', 75' or 100' available.

### Spray Boom

Strongest spray boom in the industry. Constructed of rectangular tubing, and equipped with breakaway features for each wing. When in the cradle position, the tips fold back behind the cab door, so no need to walk under dripping chemical when entering and leaving the cab.

# The Spray Boom

**Features:**

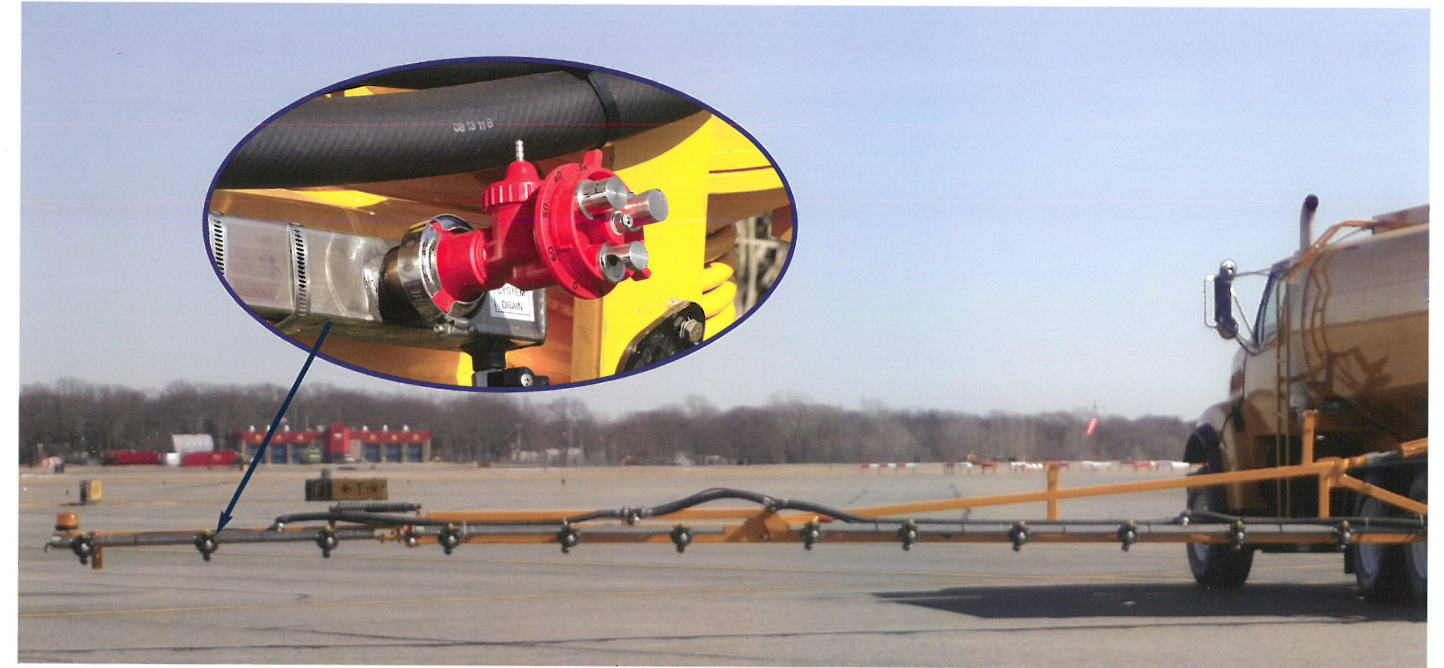

### Spray Pattern / Nozzle Selection System

No need to remove nozzle when changing from light to heavy application, or when changing from de-icing to anti-icing operations. The unique Tyler "Select A Spray" design allows for complete change over in less than 1 minute. No need to stock additional nozzles, extensions, screens, etc. for various configurations. Stop over-spraying expensive chemicals with the blast button. Apply accurately with the Tyler Ice System. Built-in spring flush check valve. Pull the lever to clear any debris from your check valve. Tyler, ready when you need to go.

### Control Console

The convenient control console features pre-set application rates. Easy operator control does not require extensive training to operate. The auto start and stop eliminates the need to hold "blast".



### Driver's Side Pumping Station

Valving and pumping station is conveniently located near the driver's side door. No need to reach between the spray boom when loading and setting up valving. Each valve handle is color coded for easy understanding of all operations. Load line located low, eliminating potential splashing of materials into the operator's face during hookup and disconnection.







**A world leader in high tech mobile spray application equipment**



**Ramp Unit De-icers**



**Truck Mounted De-icers**



**Zero Velocity Spreaders**




**Trailer Mounted De-icers**



**Slide-in Units**



**AIRPORT DE-ICING SYSTEMS**



WAUSAU EQUIPMENT COMPANY, INC.

1905 South Moorland Road, New Berlin, WI 53151-2321 • [www.wausauequipment.com](http://www.wausauequipment.com)

262-784-6066 • [sales@ausauequipment.com](mailto:sales@ausauequipment.com) • ISO 9001 Certified